


Fire resistant clear coat for wood, timber , etc.

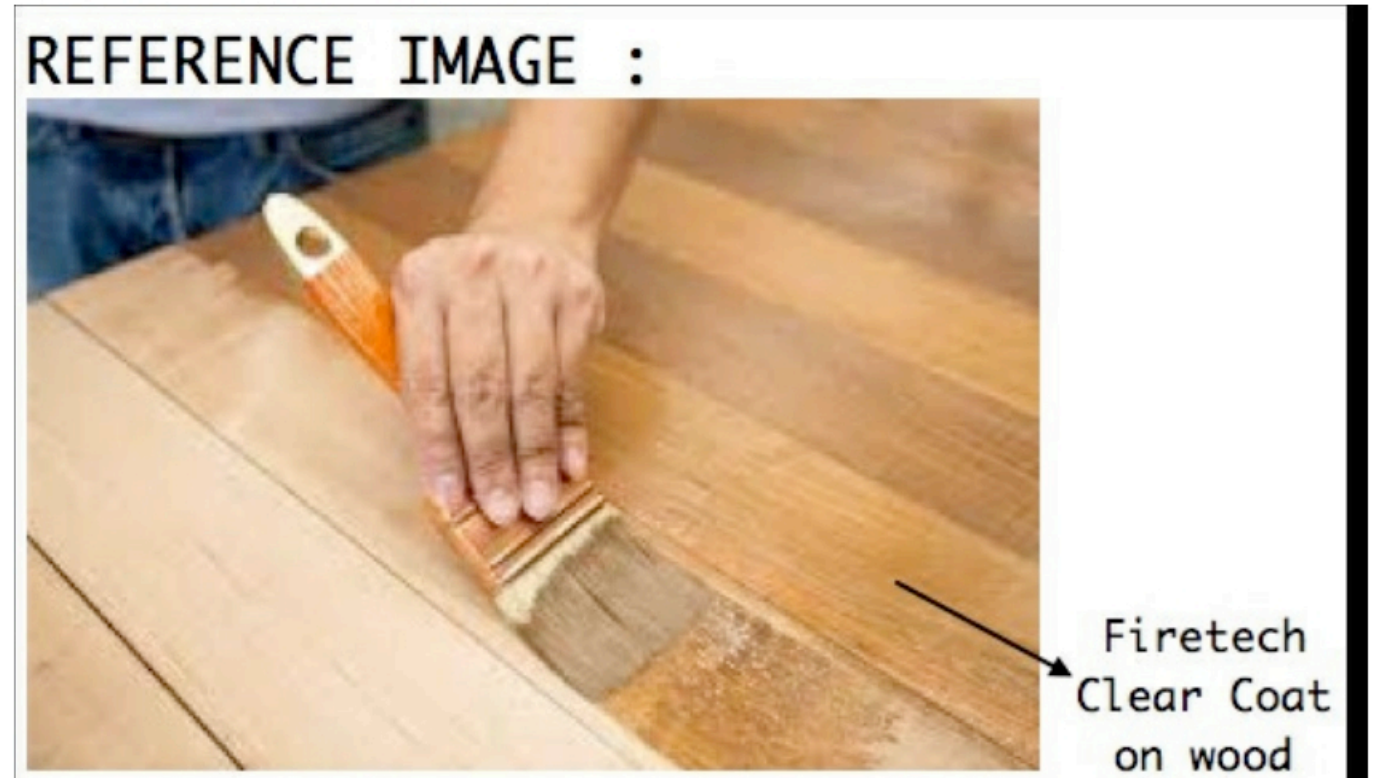

Description:

Firetech clear coat is designed to make your existing wooden structure flame resistant without changing its original color and texture. It is most feasible and up to date product developed to protect wood from fire just by easily top coating present wooden material. It is a solvent base Fire retardant coating that has been developed using latest research work and technologies. Firetech clear coat molecules permeates into holes instantly to make surface flame retardant and imparts properties which resists spread of flame . Flame dies out itself due to its unique self extinguishing properties. In the presence of heat or flame , a reaction forms a thick sponge like cellulose layer upon a heated surface which has considerable insulating value . Thus retarding the spread of flame. Its revolutionary technology saves on precious life and properties . It is a protection for Wood, Timber, etc against collapse and keeps the color of surfaces unchanged.

Features

- Excellent flame resistance property
- Economical
- Clear coating
- Unchanged surface color
- Easy Cleaning
- Controls surface spread of flame
- Easy to use
- Flames die out by itself due to unique self extinguishes properties
- Provides fire resistance barrier on a variety of substrates
- Old material becomes fireproof easily

FIRETECH CLEAR COAT



Area of Application: It is most ideal for fire protection wooden , timbers , etc like partitions , particle boards , soft and hard boards etc. It is a must to increase life and fire resistant property of wood.

Product Characteristics: Type - Liquid

Colour and finish: Transparent

Thinning - Not recommended

Shell life - 1 year

Method of application: Brush / Spray /Roller

Finish: Smooth and Clear finish

Drying time: Surface drying -4-6 hours

Hard drying: 12-24 hours

Recoating: After 24 hours

Full cure: 10-12 days as per weather conditions

Surface Preparation: All surfaces to be painted must be clean and used as per good painting practice.

Coverage: 50-60 sq feet per ltr per coat as per the surface.

Priming: Not Required

Shades: Transparent

Shelf Life: 12 months (sealed)

Packing: 20l , 4l

Cleaning: Clean all the painting equipment with water after use

Precautions:

- 1) Store in cool and dry place
- 2) Do not apply when ambient temperature is less than 10C and more than 45C
- 3) Stir well before use

Note: Application procedure of material is behind our control , We do not take any responsibility

of safety , suitability and results of product after application. It is advisable to sample check product before its application.